


High Performance Fax Capabilities & Specifications

Aficio®
1022/1027

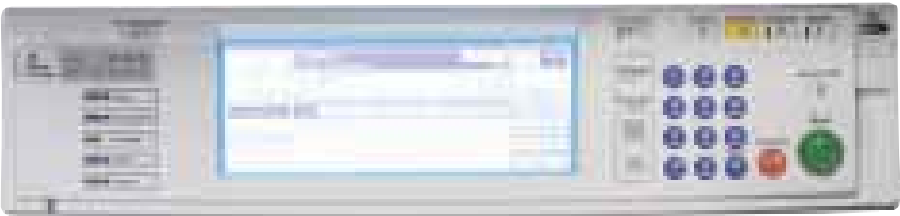

Efficient and Versatile Fax Functionality

Install the RICOH® Aficio® 1022/1027 fax module and instantly transform the Aficio 1022/1027 into a communications powerhouse! With its standard 33.6 Kbps modem, the Aficio 1022/1027 fax module speeds mission critical documents to their destinations in a little as 3 seconds per page. For more demanding fax environments, add an extra G3 line and/or ISDN Digital Fax option and run up to three lines simultaneously — a tremendous advantage during peak volume hours.

**SUPER
G3**

Fax From Your PC (LAN-Fax)

When you install the Aficio 1022/1027 fax module with the printer/scanner option, you'll be able to fax directly from your PC, which significantly boosts user productivity while enhancing existing LAN technology investments.


**Multi
Line**

Advanced Fax Technology

The Aficio 1022/1027 fax module incorporates a wealth of fax capabilities engineered to provide measurable gains in productivity and cost reductions. While traditional fax systems are limited in the number of quick dials they can offer, the Aficio 1022/1027 fax module and Touch Screen LCD combine to eliminate hard key restrictions and offer an incredible 400 standard quick dials. Add the JBIG Compression option and you'll increase quick dials to an astounding 1200, while enjoying faster transmission speeds.

All Parts Working In Harmony

Thanks to the Aficio 1022/1027's multifunctional design, you gain capabilities that virtually no stand-alone fax system can offer: Receive incoming faxes at 22 or 27 PPM at 400 dpi... send and receive 11" x 17" documents size-for-size... automatically send and receive two-sided documents... have incoming documents rotated to fit the paper size that is loaded in the Aficio 1022/1027... transmit bound

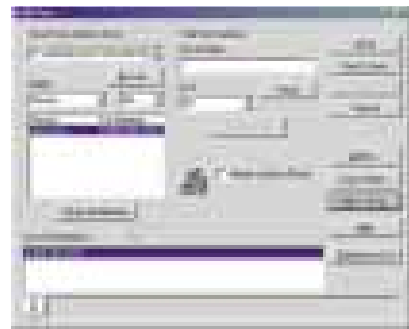

Lan-Fax Driver

originals without creating single-sided sheets. Plus, full integration with the Aficio 1022/1027's Document Server enables users to store frequently transmitted documents and forms and then re-transmit them on demand—eliminating the need to maintain extensive hard-copy files.

ISDN fax

RICOH®

Aficio® 1022/1027

Facsimile Specifications

Circuit	PSTN, PBX, ISDN (option)	Optional page memory	400 pages – requires 400dpi/page memory expansion
Compatibility	ITU-T G3, G4 (option)		2,400 pages – requires
Resolution	200 x 100/200dpi (std.) 400 x 400 dpi (option)		400dpi/page memory expansion plus JBIG/Function upgrade card
Compression method	MH, MR, MMR, JBIG (Option)	Memory backup	1 hour
Scanning speed	.8 second	Quick and Speed dials	Standard: 400 numbers Optional: 1200 numbers
Modem speed	33.6 Kbps. 64 Kbps. ISDN (G4 option)	Group dials	64 groups (500 numbers per group)
Transmission speed	G3 – 3 seconds per page (without JBIG) G3 – 2 seconds per page (with JBIG) G4 – 3 seconds per page	Program	Standard: 100 numbers Optional: 200 numbers with JBIG option
Standard page memory	160 pages	User Code	Standard: 100 Codes (Max. 500 codes with optional "User Account Enhance Unit")

Options

Fax Option Type 1027

G3 Interface Type 1027

400 dpi / Page Memory

JBIG / Function Upgrade Card Type 185

Handset Type 1027

ISDN Option Type 1027

Fax Stamp Type 450

General Features	Transmission Features	Reception Features	Telephone Features
AI short protocol Auto document Auto reduction Direct fax number entry Dual access Energy saver ID code programming LCD prompt Memory file transfer Page count Redial Remaining memory indication Summer time (day light saving time) User data transfer User function key User parameter setting Wild cards	Batch transmission Book fax Closed network (transmission) Confidential transmission/with ID Double sided transmission Economy transmission Error correction mode Forwarding Image rotation Immediate transmission Memory transmission Multi-step Transfer Page retransmission Parallel memory transmission Polling transmission Send later Serial broadcasting (500 numbers) Transfer request Transfer transmission	2 in 1 (two in one) Authorized reception Automatic reception Center mark Checked mark Closed network Confidential reception Continuous polling Duplex reception Manual reception Memory lock Multicopy (1 to 9 sets with sorting) Multi-polling reception Polling from memory Poll later (500 senders) Polling reception (500 senders) Reception time printing Special reception numbers (30 numbers) Substitute reception	Answering machine interface Auto answer delay time Automatic fax/phone change Busy tone detection Chain dialing Handset / telephone Monitor speaker On hook dial Pause Pulse/tone selection Reception mode selection Reception mode switch over (remote) Reception mode switching timer Silent ringing detection Telephone connection Tone transmission

Specifications and external appearances are subject to change without notice.

Ricoh Consumables. For maximum performance and yield, we recommend using genuine Ricoh parts and supplies.



EPA 2000 Office Products Partner of the Year (5th consecutive year)
EPA 2000 Labeling Partner of the Year
Ricoh Corporation has determined that this product meets the Energy Star® guidelines for energy efficiency.



There is a name synonymous with the business world: Deming.
Named for Dr. W. Edwards Deming, the Deming Medal Award recognizes corporations and individuals that demonstrate an outstanding commitment to quality control. Ricoh has won two coveted Deming Prizes for quality control.



Printed in U.S.A. on recycled paper because Ricoh cares.

Ricoh is a registered trademark of Ricoh Company, Ltd.
All other trademarks are the property of their respective owners. © Ricoh Corporation

RICOH®
Image Communication

Ricoh Corporation, Five Dedrick Place, West Caldwell, NJ 07006
Phone: (973) 882-2000 Website: <http://www.ricoh-usa.com>
CA-0144F